


Back To Catalogue (Products.html) | (Products_Remote_Controller.html) Other Continuous Lighting (Products_Continuous_Lighting.html)

RGB LED Light Stick LC500R



LUJUUK


RGB LED Light Stick

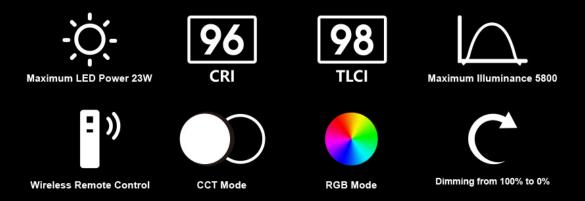

Godox LC500R looks like a lightsaber, ideal for hand-holding. It is everything that you loved about its predecessor LC500, but with additional RGB mode and FX light effect to further free your creativity. Its two-way barndoor shapes and directs the light spread. With the CRI rating at 96 and TLCI at 98, the light reproduces the nature and vibrant colors.

Multi-color, Multi-function, Multi-use

RGB Mode

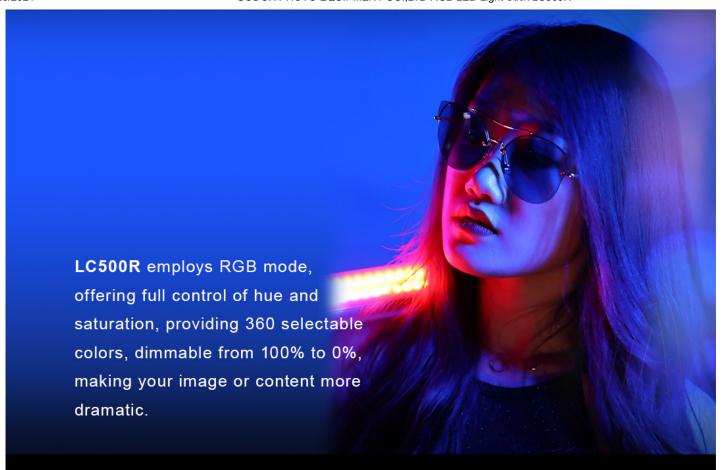

Fx Light Effect Mode

The light fixture has 14 kinds of built-in Fx light effects containing 39 various presets in total for more creative use in film and photography, ideal for vlogging.



RGB cycle



Flash



Laser



Lightning



Broken Bulb





Candle



Fireworks



Cop Car



Fire Engine




Ambulance



Music





SOS

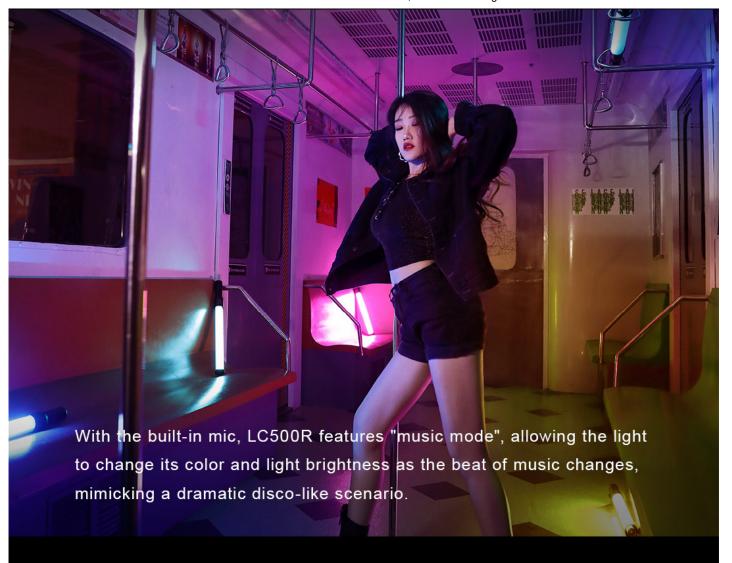

CCT Mode

In addition to the RGB mode, the LC500R also features CCT mode to precisely adjust the color temperature from 2500K to 8500K.

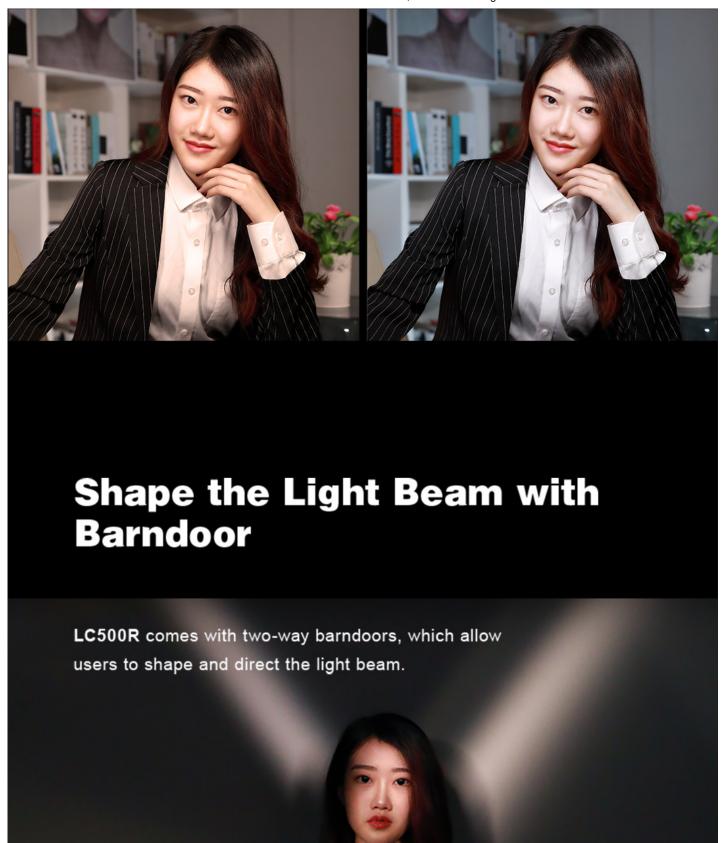

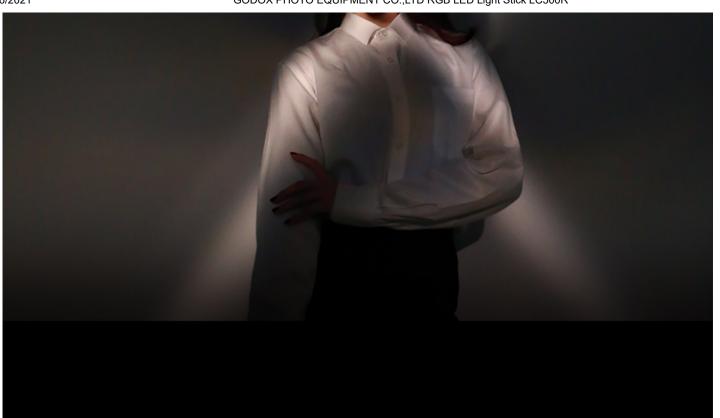

Flexible Light Placement


The bright RGB light stick is super lightweight and ideal for handheld, easy for users to see where the light falls immediately. The LC500R ends with 1/4"-20 thread to mount to a tilter bracket, tripod or light stand, giving more flexible light placement.



More lighting setups for professional productions

Using groups of LC500R for lighting setup for professional productions like cinematic interview, commercial and documentary filmmaking, it is not difficult anymore to create professional lighting set-ups and make your client looks good.



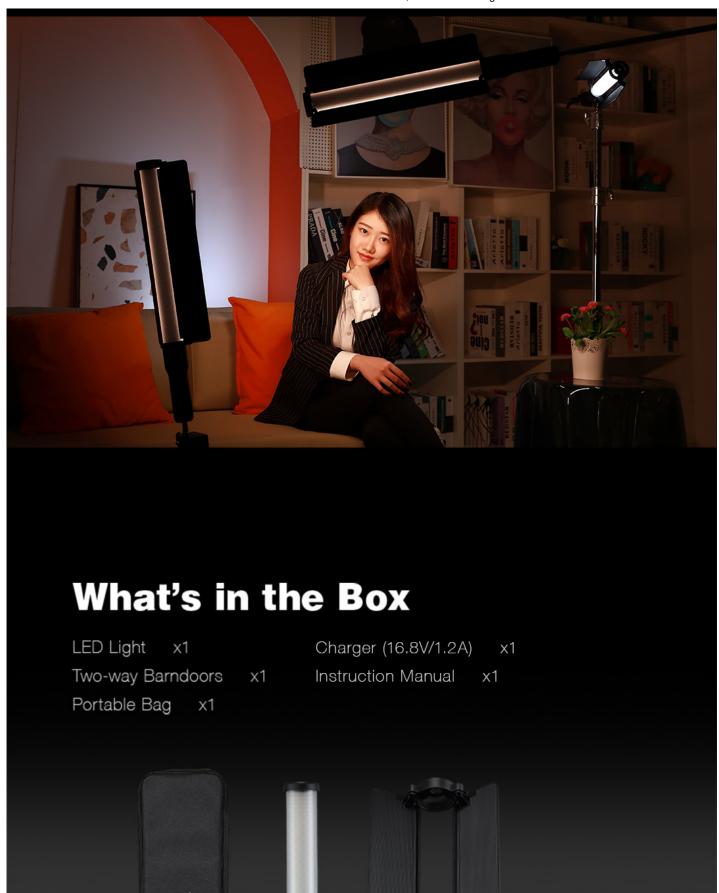



Specification

RGB LED Light Stick	LC500R
Built-in Lithium Battery	14.4V/2600mAh Lithium Battery
Power Consumption	Maximum Power 23W
Channel	32
Group	6 (A, B, C, D, E, F)
Color Temperature Range	2500K-8500K
Dimming	100%-0%
RGB Range	360 full colors
100% Illumination (Lux) (1m, dark room)	5800 max
CRI	Approx.96
TLCI	Approx.98
Battery Running Time at Full Power	Approx.90 mins
Operating Temperature	-10°C~40°C
Dimension (Without Barndoor)	616*56*56mm
Net Weight (Without Barndoor)	0.81kg

www.godox.com

Home (../EN/index.html) | Site info (../EN/AboutUS.html) | Disclaimer (../EN/AboutGodoxwebsite.html) | Contact

(../EN/ContactUS.html) | Download (../EN/Download.html)

COPYRIGHT(©) 2009-2026 GODOX PHOTO EQUIPMENT CO.,LTD. ALL RIGHTS RESERVED